



MULTISLIDE DOOR

LEPAGE
MILLWORK





Engineered to fully open up large sections of wall, our multislide creates a seamless transition between indoor and outdoor spaces, thanks to a sill that integrates smoothly with the finished floor.

In designing this new door, our research and development team set a clear goal: to meet the highest industry standards for both performance and design.

Why choose a multislide door?

Elegant and durable, it transforms your space into a place where nature and comfort coexist in perfect harmony.

Move effortlessly from indoors to outdoors—simply and smoothly.

About Lepage Millwork

With over 75 years of tradition, Lepage crafts each product by hand with meticulous care. While rooted in time-honoured craftsmanship, our products are engineered to meet the most demanding performance standards in real-world conditions.

Contact your authorized Lepage Millwork dealer to learn more.



KEY FEATURES

Capacity


- > Height: 12 ft / Width: 30 ft
- > Maximum surface area per panel:
 - 45 sq. ft for an operable panel
 - 55 sq. ft for a fixed panel
- > Triple or double insulating glass

Construction

- > 2 1/4" panel thickness
- > Solid wood frame
- > Solid wood interlock
- > Reinforced stiles
- > Multiple drainage options

Design

- > Finish coordinated with other Lepage Millwork products
- > Sleek fibreglass sill
- > Optional recessed sill
- > Multiple sill profiles, one solution

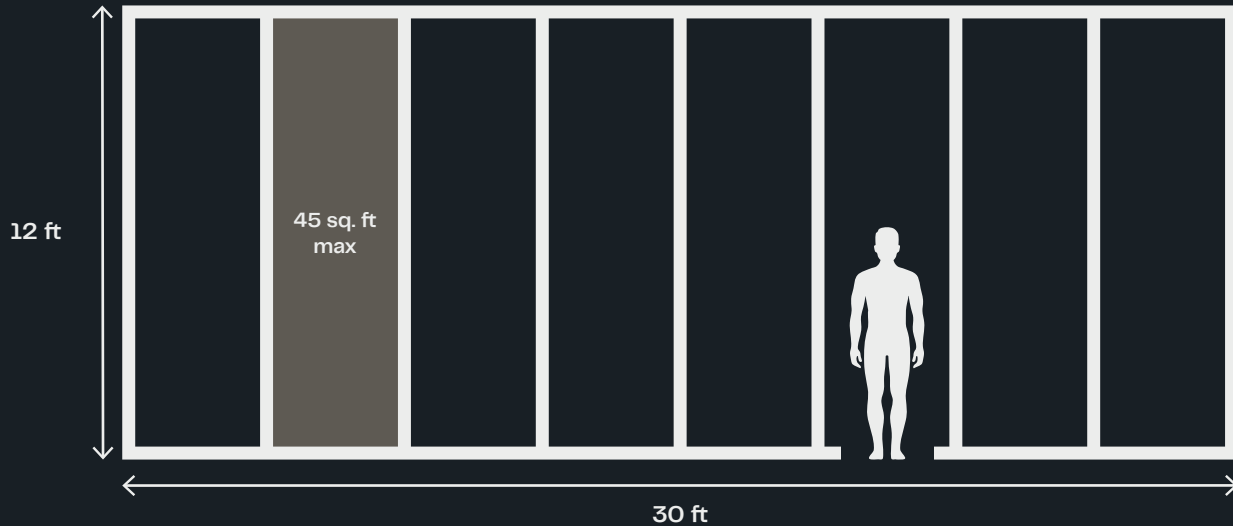

CONFIGURATIONS

Single-direction Stacking	Double-opening Stacking	Single-direction Pocket*	Double-opening Pocket*
2-panel door unit OX / XO	4-panel door unit OX-XO	2-panel door unit PXX / XXP	4-panel door unit PXX-XXP
3-panel door unit OXX / XXO	6-panel door unit OXX-XXO	3-panel door unit PXXX / XXXP	6-panel door unit PXXX-XXXP
4-panel door unit OXXX / XXXO	8-panel door unit OXXX-XXXO	4-panel door unit PXXXX / XXXXP	8-panel door unit PXXXX-XXXXP
5-panel door unit OXXXX / XXXXO	10-panel door unit OXXXX-XXXXO	5-panel door unit PXXXXX / XXXXXP	10-panel door unit PXXXXX-XXXXXP
6-panel door unit OXXXXX / XXXXXO	12-panel door unit OXXXXX-XXXXXO	6-panel door unit PXXXXXX / XXXXXXP	12-panel door unit PXXXXXX-XXXXXP
7-panel door unit OXXXXXX / XXXXXO		7-panel door unit PXXXXXXX / XXXXXXP	
8-panel door unit OXXXXXXX / XXXXXO		8-panel door unit PXXXXXXX / XXXXXXP	

P = Pocket panel O = Fixed panel X = Operable panel

*The pocket configuration allows for a fully unobstructed opening.

SILL OPTIONS



Standard Sill



Embedded Sill

A variety of sill and drainage options are available, depending on the door's location, intended use, and desired aesthetic.

INTERLOCK

A solid wood interlock with a clean, minimalist design, offering exceptional sealing performance and a premium finish that highlights the natural beauty of the wood—painted or stained.



PRESTIGE HANDLES




Dallas

Austin Flush

A full selection of standard handles is also available upon request.


HARDWARE

Finishing plate to conceal roller adjustment mechanisms

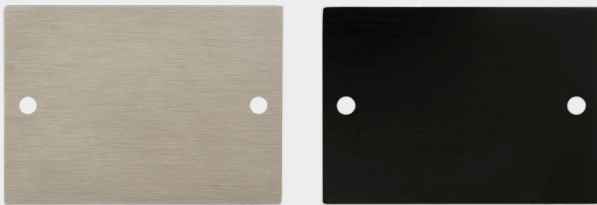

- › Available in two finishes:
 - Black finish – matches darker tones
 - Stainless steel finish – complements lighter tones

Stainless steel rolling system – HRS1200S Model

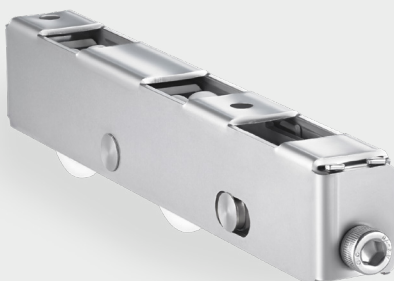

- › High load capacity per panel: 200 kg (440 lb)
- › Housing material: 304 stainless steel
- › Salt spray tested: 1,000 hours





141, chemin des Raymond
Rivière-du-Loup (Québec) G5R 4L9
Canada

418 862-2611 | 1 800 463-1367
info@lepagemillwork.com

LEPAGEMILLWORK.COM

